


Blue Line Open Frame Monitor

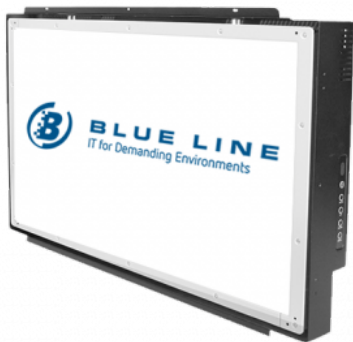

Highlights

Open frame monitor available in many sizes from 5.7" to 85" in different resolutions and aspect ratios. Integration in-wall or rear mount. Suitable for many industries and customisable according to application and environment. Projected capacitive touch can be operated with gloves. True flat front easy to clean.

Reduce cost and time spending with our global partner model based on your specific requirements. Let Blue Line take responsibility for delivery on time. Blue Line's ultimate goal is to help our customers get peace of mind by handling all relevant details such as securing the right configuration, software setup, mounting, packaging, labeling etc. Ask for references from your industry.



- Open frame monitor 5.7" to 85"
- Different resolutions and aspect ratios available
- Resolution up to 3840 x 2140 ultra HD
- In-wall or rear mount for integration
- With or without touch
- Resistive or PCAP multi touch (supports gloves)
- True flat front easy to clean
- IP65 front
- Large range of options
- Customisation according to your requirements



BLUE LINE
IT for Demanding Environments

- has more than 30 years experience
- delivers reliable IT solutions for demanding environments
- builds compact and high performance solutions
- focuses on long duration, 24/7-operation, and ruggedness
- is ISO 9001:2015-certified
- is known for providing the best assistance and services in all phases.

Blue Line Open Frame Monitor

Specifications

Model Type

Open frame monitor

Construction

Glass front - metal rear housing

Cooling

Fanless from 5.7" to 27"

Active fan from 32" to 85"

Ingress Protection

Front IP65 with front folie sealing

Environment

Operating temperature 0°C to +50°C

Storage temperature -20°C to +60°C

Humidity 10% to 90% (non-condensing)

Certification

CE

Display

True flat front

Sizes from 5.7" to 85"

Resolution from 640 x 480 and up to 3840 x 2160 ultra HD

Aspect ratio 4:3 / 5:3 / 5:4 / 16:9 / 16:10

Touch

Projected capacitive multi touch (support gloves)

Resistive touch from 5.7" up to 24" (optional)

Without touch (optional)

Optical bonding (optional)

Brightness

200 to 450 nits

Option for high brightness 1000 to 1500 nits

Rear Input / Output

1 x VGA

Option for HDMI / display port / DVI

1 x USB 2.0 touch

OSD control panel

1 x power input

Power Supply

AC input or DC input

Mounting

In-wall / rear mount

Warranty and After Sales Support

Standard 1 year (option for 3 years)



BLUE LINE
IT for Demanding Environments

Blue Line A/S | Kappa 8 | 8382 Hinnerup, Denmark
T +45 8678 5000 | www.blue-line.com