
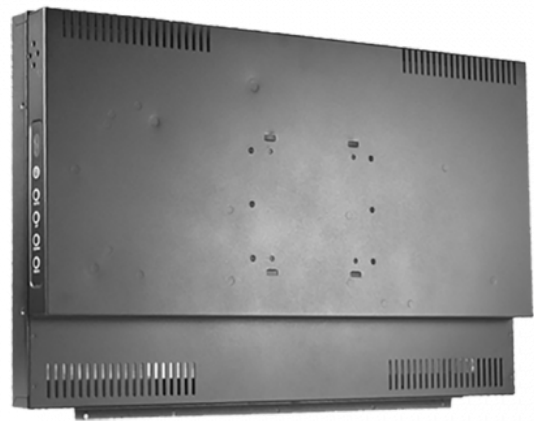


# Open Frame Monitor Outdoor

---

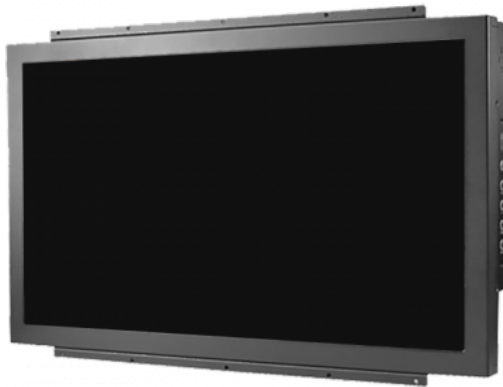

---

## Highlights

High brightness outdoor open frame monitor available in many sizes from 5.7" to 32" for integration in chassis or rear mount. Large range of options for improved outdoor performance. Touch firmware can be optimised to outdoor use, e.g. rain mode and support of gloves. Customisation according to application and environment. Benefit from our specialists and know-how.

Reduce cost and time spending with our global partner model based on your specific requirements. Let Blue Line take responsibility for delivery on time. Blue Line's ultimate goal is to help our customers get peace of mind by handling all relevant details such as securing the right configuration, software setup, mounting, packaging, labeling etc. Ask for references from your industry.



- Outdoor open frame monitor 5.7" to 32"
- Different resolutions and aspect ratios available
- Resolution up to 1920 x 1080 Full HD
- High brightness 1000 to 1500 nits
- Chassis integration or rear mount
- With or without touch
- Resistive or PCAP multi touch
- IP65 front
- Large range of options for improved outdoor performance
- Optical bonding prevents condensation and improves sunlight readability
- Touch firmware optimised to outdoor use, e.g. rain mode and support of gloves
- Auto-brightness
- UV-filter
- Anti-reflection
- Tempered glass
- Customisation according to your requirements



**BLUE LINE**  
IT for Demanding Environments

- has more than 30 years experience
- delivers reliable IT solutions for demanding environments
- builds compact and high performance solutions
- focuses on long duration, 24/7-operation, and ruggedness
- is ISO 9001:2015-certified
- is known for providing the best assistance and services in all phases.

# Open Frame Monitor Outdoor

## Specifications

### Model Type

Open frame monitor

### Construction

Glass front - metal rear housing

### Cooling

Fanless up to and included 27"

Active fan from 32"

### Ingress Protection

IP65 front and IP50 Rear

### Environment

Operating temperature -20°C to +60°C

Storage temperature -20°C to +60°C

Humidity 10% to 90% (non-condensing)

### Certification

CE

### Display

Sizes from 5.7" to 32"

Resolution from 640 x 480 up to 1920 x 1080 Full HD

Aspect ratio 4:3 / 5:3 / 5:4 / 16:9 / 16:10

### Touch

Projected capacitive multi touch

Resistive touch from 5.7" up to 24"

Without touch

Optical bonding (optional)

Auto-brightness sensor (optional)

UV-filter (optional)

Anti-reflection surface treatment (optional)

Tempered glass (optional)

Touch firmware optimized to actual use (optional)

### Brightness

High brightness 1000 to 1500 nits

### Rear Input / Output

1 x VGA

Option for HDMI / display port / DVI

1 x USB 2.0 touch

OSD control panel

### Power Supply

AC input / DC input

### Mounting

Integration in chassis / rear mount

### Warranty and After Sales Support

Standard 1 year (option for 3 years)



**BLUE LINE**  
IT for Demanding Environments

Blue Line A/S | Kappa 8 | 8382 Hinnerup, Denmark  
T +45 8678 5000 | [www.blue-line.com](http://www.blue-line.com)